

## Product Technical Data Sheet

### 12-14 Hex Head Hi Grip TekS with Seal Climaseal 4

Part Number	Description	Pack Qty	Pallet Qty
6-310-3326-6C4	12-14 x 68 Hex Head Hi Grip TekS with Seal Climaseal 4	1000	60,000
6-310-3580-1C4	12-14 x 80 Hex Head Hi Grip TekS with Seal Climaseal 4	500	36,000

#### Application:

Buildex® 12 -14 Hex Head HiGrip® TekS® Screws are used for crest fixing Corrugated and Square Rib Roof Sheets to steel purlins.


Features	Benefits
Hex Drive	For positive drive under high installation torque.
Hi Grip	To fix the crest of the sheet to create a positive connection between the sheet and the screw.
Teks Point	For drilling into metal while ensuring maximum pullout strength and high strip torque.
Finish	Corrosion performance of Climaseal 4 to suit the application.
Colormatch	The 12-14 Hex Head TekS can be painted to match Colorbond sheeting products.

#### Installation Instructions:


1. Use a 5/16" Hex Socket.
2. Use a mains powered or cordless screw driver with a drive speed of 3,000 RPM maximum.
3. Fit the driver bit into the screw and place at the fastening position.
4. Apply consistently firm pressure (end load) to the screw driver until the screw has fastened.

#### Drilling and Installing Capacity


Single Thickness of Metal



Multiple Pieces of Metal



Multiple Pieces of Metal with Air Gap



Mechanical Properties		
Single Shear Strength (N)	Axial Tensile Strength (N)	Torsional Strength (Nm)
8500	13600	12.3

Pullout Values (N)						
Steel Purlin G450 1.2mm	Steel Purlin G450 1.5mm	Steel Purlin G450 1.9mm	Steel Purlin G450 2.4mm	Steel HRS 2.0mm	Steel HRS 3.0 mm	Steel HRS 4.0 mm
2600	4680	6500	8100	5300	9900	11200

All values are averages obtained under laboratory conditions and appropriate safety factors should be applied for design purposes. These figures are applicable to Buildex® head marked product only.


**Material:** Carbon Steel SAE 1022 | **Heat Treatment:** To AS 3566.1 | **Finish:** Climaseal 4®

#### Corrosion Performance:

Climaseal 4 Fasteners are suitable for use in Category 4 and 3 corrosive environments as described in ISO 9223-2012 and AS4312-2008

## Product Technical Data Sheet

### 12-14 Hex Head Hi Grip Tekes with Seal Climaseal 4

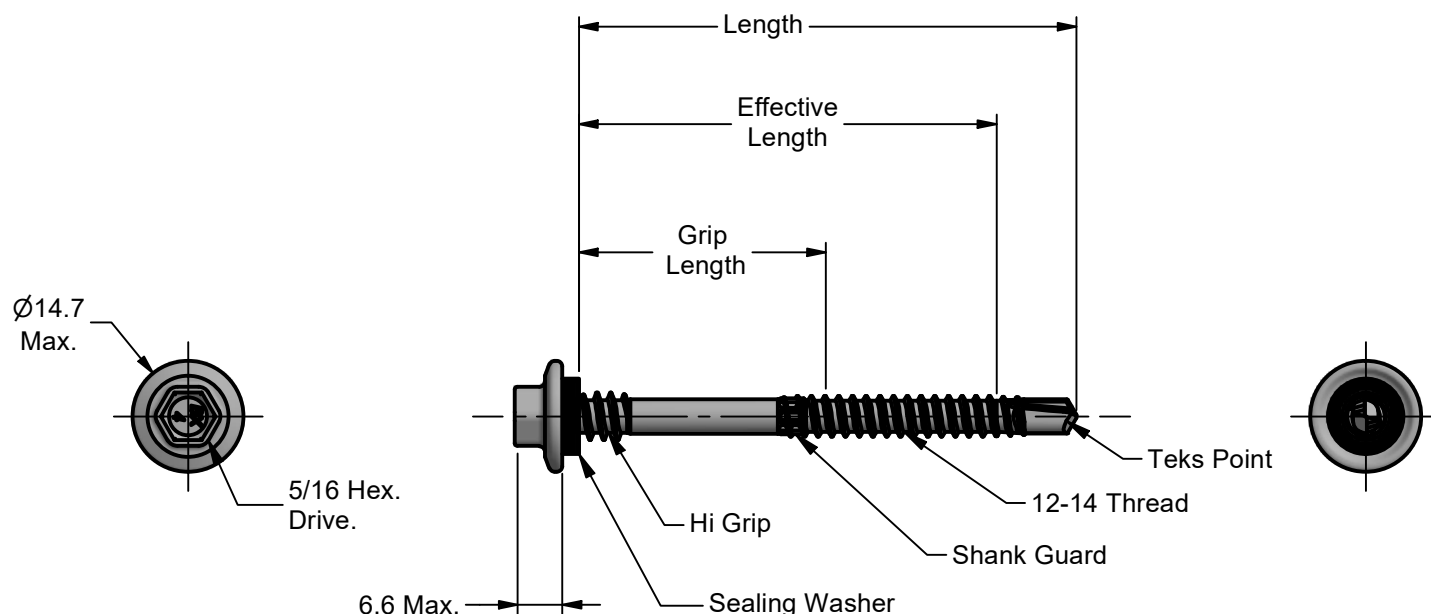

#### Note

Lengths from underside of sealing washer and includes compression.

Part Number	Description	Length	Grip Length	Effective Length
6-310-3326-6C4	12-14 x 68 Hex Head Hi Grip Tekes with Seal Climaseal 4	66.0 / 67.5	35.0 Min.	51.5 Min.
6-310-3580-1C4	12-14 x 80 Hex Head Hi Grip Tekes with Seal Climaseal 4	78.0 / 79.5	42.0 Min.	63.5 Min.

All dimensions nominal unless otherwise stated. Normal manufacturing tolerances apply. All dimensions in millimeters. Third Angle Projection. Scale Full Size.

Buildex® Head Office  
600 South Road  
Moorabbin Victoria 3189  
Australia  
1300 368 101  
CustomerService-MBN@buildex.com.au  
Technical Help Desk  
Technicalhelpdesk@buildex.com.au