

Product Technical Data Sheet

Flat Csk Needle Point and Chipboard Screws

Application:

Buildex 8-10 and 10-8 Csk Ribbed Needle Point screws are used for fixing into treated pine.

Features	Benefits
Cross Recess Drive	For positive drive under high installation torque.
Head with Ribs	For easy embedment into timber
Thread	Coarse thread enables strong engagement into host material
Needle Point	For fast and easy installation
Finish	Corrosion performance of Climacoat to suit the application.

Installation Instructions:

1. Use a Number 2 Phillips Cross Recess driver bit.
2. Use a mains powered or cordless screw driver with a drive speed of 3,000 RPM maximum.
3. Insert the screw into the driver bit and place at the fastening position.
4. Apply consistent firm pressure (end load) to the screw driver until the screw has fastened.

Drilling and Installing Capacity

Timber: Chipboard, and Timber: F7 (Pine) - minium embedment 20.0 mm


Material: Carbon Steel SAE 1022 | **Finish:** Climacoat

Corrosion Performance:

Corrosion performance of Climacoat designed specifically to suit treated timbers.

Product Technical Data Sheet

Flat Csk Needle Point and Chipboard Screws

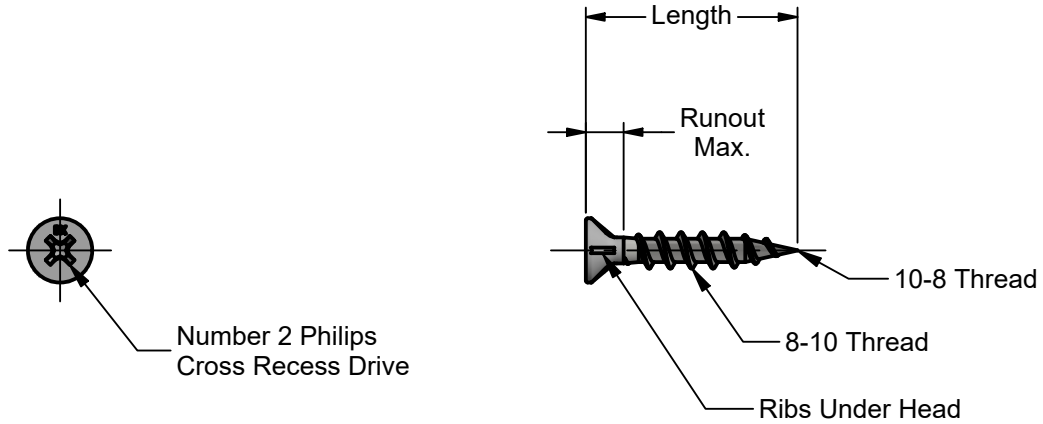

All dimensions nominal unless otherwise stated. Normal manufacturing tolerances apply. All dimensions in millimeters.
Third Angle Projection.

Description	Part Number	Pack Qty	Pallet Qty	Length	Runout
8-10 x 25 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0101-6CC	1000	216,000	24.0 / 26.0	5.0 Max.
8-10 x 32 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0102-4CC	1000	288,000	31.0 / 33.0	7.0 Max.
8-10 x 35 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0107-5CC	1000	288,000	34.0 / 36.0	10.0 Max.
8-10 x 40 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0103-2CC	1000	216,000	39.0 / 41.0	15.0 Max.
8-10 x 45 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0104-1CC	1000	216,000	44.0 / 46.0	15.0 Max.
8-10 x 50 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0105-9CC	500	144,000	49.0 / 51.0	15.0 Max.
8-10 x 57 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0106-7CC	1000	105,000	56.0 / 58.0	17.0 Max.
10-8 x 65 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0110-2CC	1000	105,000	63.5 / 65.0	20.0 Max.
10-8 x 75 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0109-1CC	1000	72,000	73.5 / 75.0	30.0 Max.
10-8 x 100 Csk Rib Needle Pt Treated Pine Climacoat	6-241-0120-7CC	500	42,000	98.5 / 100.00	40.0 Max.

Buildex Head Office
600 South Road
Moorabbin Victoria 3189
Australia

Contact Customer Service for further enquiries
1300 368 101
customerservice@buildexanz.com